



TI-MA-73


Accessories for CD Jukeboxes

Note: Following abbreviations are used in below descriptions:

O.I. = Operating Instructions CD Jukeboxes SCC 40315
 TI-MA-.. = Technical Information for Jukeboxes

I. BACKGROUNDADAPTER (48 861 004 00)

0010252

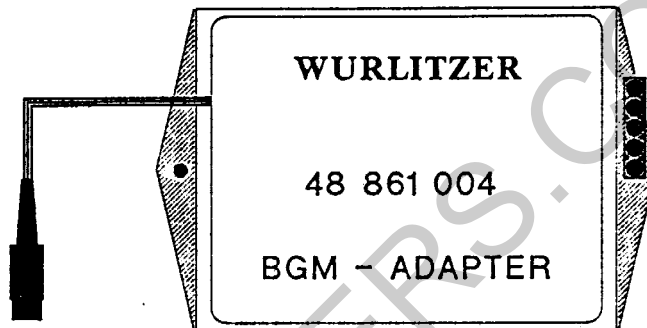


An external source like radio or cassette player can be piped in mono by the jukebox. If a selection is made at the jukebox, the background music stops while the record is playing and resumes when the record is finished.

Detailed description in Information TI-MA-24

II. BACKGROUND-CD-RTC-ADAPTER (51 890 200 00)

0031056

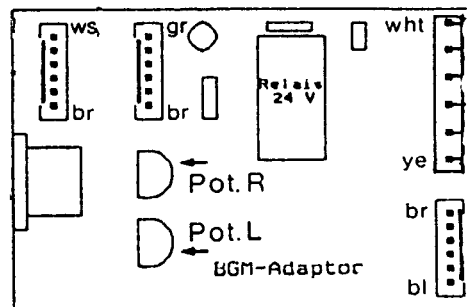


This adapter reduces the volume of a playing BGM track. The volume reduction of normal sound is adjustable by two pots on the board. Standard in OMT CD and New York, NY.

Detailed circuit see O.I. on page 55 and 56.

III. BACKGROUND-CONNECTOR (48 861 004 00)

0035580

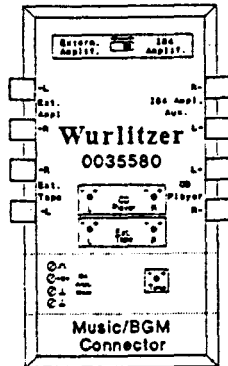


This Background-Connector can be used to pipe an external stereo source (radio, cassette player) by the jukebox, or the jukebox sound can be reproduced by an existing music and background system.

Detailed description in TI-MA-67

IV. PRINTER FOR DATA RETRIEVAL (00 040 001 14)
with CABLE (40 099 003 00)
and METAL PAPER ROLL


0011715
0005631
0035787

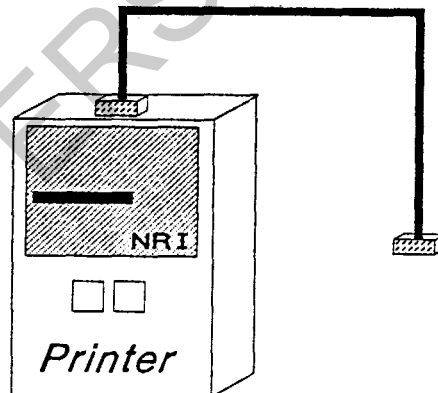

This printer can be used to print out the number of Top Tunes, Flops, total plays; cash box contents, setting of the SCC unit and individual machine number.

V. CV-LINE TRANSFORMER
CV-LINE UL VERSION (USA)


0001462
0006926

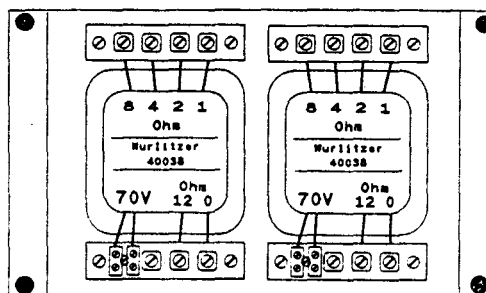

For connection of an external loudspeaker to match its impedance or volume. Also 70V loudspeakers are connectable.

VI. INFRA RED REMOTE VOLUME CONTROL (40 089 000 00)

0001890

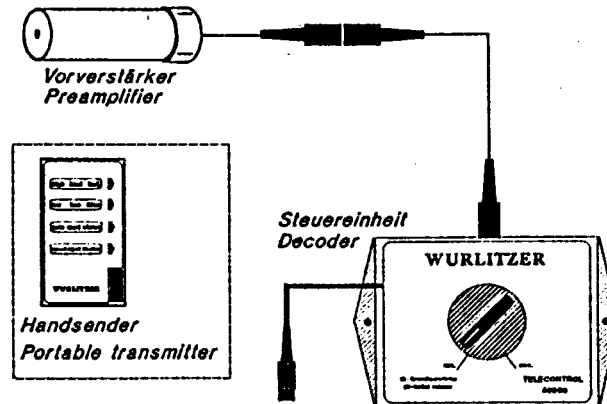

With this wireless RVC four basic functions can be controlled over a portable transmitter:


- increase of volume
- decrease of volume
- mute the sound
- reject the record

The initial volume by power on is adjustable on the IR control unit.

Detailed description in TI-MA-61

VII. BOOSTER AMPLIFIER (43 885 153 00)
with POWER SUPPLY (43 885 158 00)0032159
0032165

only for 220/240 Volts

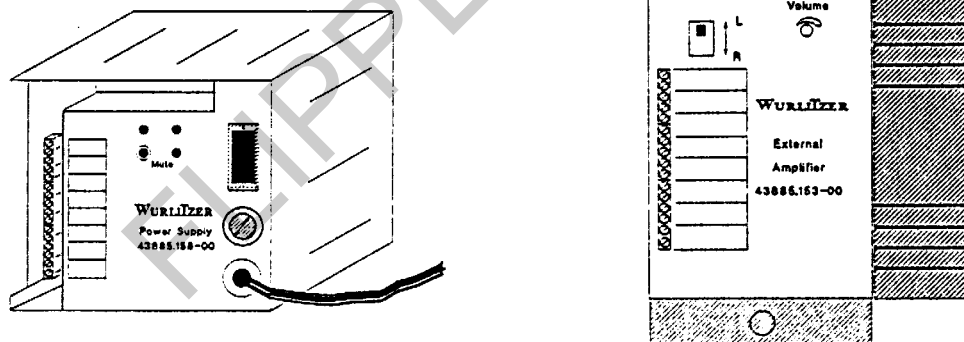


With a load of 4Ω, one booster amplifier gives 38W power output with 0,15% distortion. One power supply can drive 4 single booster amplifier. The booster amplifier has to be mounted at the rear of the external loudspeakers.

Detailed description in TI-MA-50

VIII. MICROPHONE KIT (40 090 000 00)

0006953

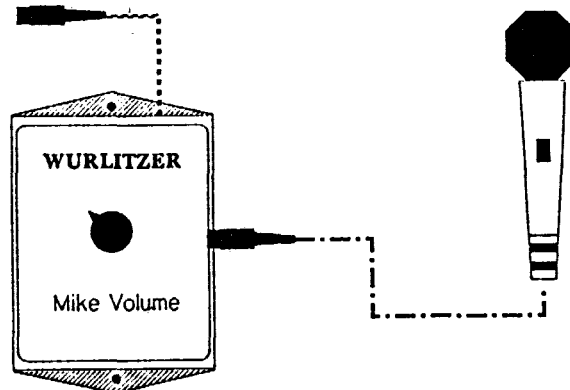


This unit enables the use of the phonograph as a paging system, when playing as well as during idling periods. If the paging microphone is switched on while the phonograph is playing, the music fades away for this period. The volume of the microphone is adjustable at the pre-amplifier box. A cable length of 15 meters (approx. 50 feet) allows to install this kit in distance to the jukebox.

Detailed information in TI-MA-63

IX. WALLBOX ADAPTER KIT (43 885 410 00)

0030773

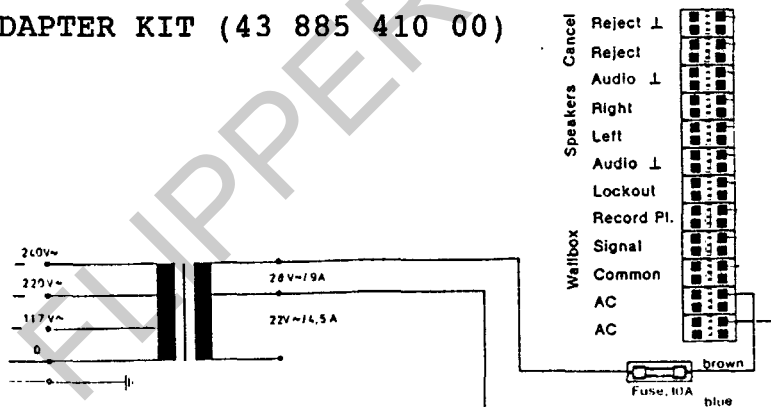

This adapter kit consists of a transformer and a terminal connector block and has to be installed inside the jukebox. A maximum of 4 wallboxes are connectable to one transformer, in case that one wallbox has a consumption of max. 2 Amps.

Detailed schematic in O.I. on page 57.

X. TEST COMPACT DISC

0028598




With the Wurlitzer Test CD the jukebox can be tested for correct sound, e.g. correct polarity of the loudspeakers (left-right), adjustment of amplifier, test of CD control and player.

Description of tracks in TI-MA-74

XI. SAMPLE CD

0028773

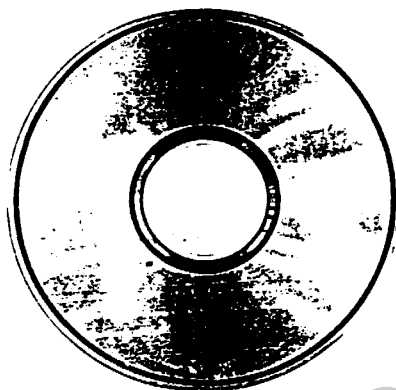

A CD without sound. If the carrier is not filled completely with CDs to be played, sample CDs can be added to have a full carrier optically.

XII. EXTRA LOUDSPEAKER LS 120


0003528



Technical data:
OMT-Loudspeaker in 2-way-system
Dimensions: 520x320x250 mm (HxWxD)
Music power: 120W
Impedance: 8Ω

XIII. EXTRA LOUDSPEAKER MODEL 4008


0029133

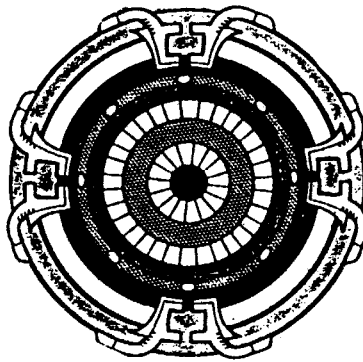

Technical data:
OMT-Loudspeaker in 3-way-system
Dimensions: 860x440mm (WxD)
Music power: 80W
Impedance: 8Ω

XIV. REMOTE VOLUME CONTROL

with CABLE EXTENSION of 14m/46 feet (40 200 006 00) 0008873

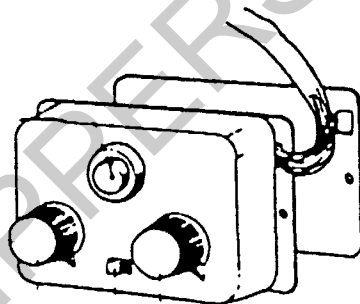

This volume control is the same unit as fitted in the amplifier, but with a connected cable of 14m length (46 feet) to be used for fixed installation in distance to the jukebox.

XI/91 gr-ze